



**Hewlett Packard**  
Enterprise

# **HPE Security ArcSight Connectors**

SmartConnector for McAfee Network Security  
Manager DB (ID-based)

Configuration Guide

November 30, 2016

## Configuration Guide

### SmartConnector for McAfee Network Security Manager DB (ID-based)

November 30, 2016

Copyright © 2004 – 2016 Hewlett Packard Enterprise Development LP

#### Warranty

The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise Development LP shall not be liable for technical or editorial omissions contained herein. The information contained herein is subject to change without notice. The network information used in the examples in this document (including IP addresses and hostnames) is for illustration purposes only. Hewlett Packard Enterprise Development LP products are highly flexible and function as you configure them. The accessibility, integrity, and confidentiality of your data is your responsibility. Implement a comprehensive security strategy and follow good security practices. This document is confidential.

#### Restricted Rights Legend

Confidential computer software. Valid license from Hewlett Packard Enterprise Development LP required for possession, use or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Follow this link to see a complete statement of Hewlett Packard Enterprise Development LP copyrights, trademarks and acknowledgements:

<https://www.protect724.hpe.com/docs/DOC-13026>.

## Revision History

---

Date	Description
11/30/2016	Added support for version 8.3. Updated configuration parameters and added global parameters.
06/30/2016	Updated MySQL JDBC driver information.
05/16/2016	Updated link for MySQL JDBC driver.
11/17/2015	Updated Device Product field mapping.
08/14/2015	Renamed this connector from McAfee Network Security Manager DB (New) to McAfee Network Security Manager DB (ID-based).
06/30/2015	Added support for version 8.2.
09/30/2014	Added support for version 8.1.
05/15/2014	Added new mappings for Confidence, Signature Name and Signature ID for v7.5 and v8.0.
03/31/2014	Added support for version 8.0.
02/14/2014	Updated parameter screen image.

---

## Contents

Product Overview.....	4
Configuration.....	4
Install the SmartConnector.....	4
Prepare to Install Connector .....	4
Install Core Software.....	5
Download MySQL JDBC Driver .....	6
Set Global Parameters (optional).....	6
Select Connector and Add Parameter Information.....	7
Select a Destination .....	8
Complete Installation and Configuration .....	8
Payload Support .....	9
Run the SmartConnector .....	10
Device Event Mapping to ArcSight Fields .....	10
NSM 8.x Mappings.....	10
NSM 8.x Payload Mappings.....	11
NSM 8.x Payload Type Specific Data Mappings.....	12
NSM 8.x Type Specific Data Mappings.....	12
NSM 7.5 Mappings .....	13
NSM 7.5 Payload Mappings.....	13
NSM 7.5 Payload Type Specific Data Mappings.....	14
NSM 7.5 Type Specific Data Mappings.....	15
Troubleshooting .....	15

## SmartConnector for McAfee Network Security Manager DB (ID-based)

This guide provides information for installing the SmartConnector for McAfee Network Security Manager DB (ID-based) and configuring the device for event collection. The SmartConnector for McAfee Network Security Manager DB supports versions 7.5, 8.0, 8.1, 8.2, and 8.3.

This connector uses UUID as the key field in the SQL query for events. This is per McAfee's recommendation. The SmartConnector for McAfee Network Security Manager DB (Time-based) uses timestamp as the key field for the SQL query. Using timestamp as the key field resulted in a possible loss of events. HP recommends that you migrate to the SmartConnector for McAfee Network Security Manager DB (ID-based).

### Product Overview

McAfee Network Security Manager is a network intrusion detection system capable of performing real-time traffic analysis and packet logging on IP networks. It can perform protocol analysis and content searching/matching, and can be used to detect a variety of attacks and probes, such as buffer overflows, stealth port scans, CGI attacks, SMB probes, and OS fingerprinting attempts.

### Configuration

Because MySQL supports host-based access control, you may find it necessary to configure MySQL to allow connections from the host where the ArcSight SmartConnector is running. To allow MySQL access, execute the following command in a MySQL prompt:

```
GRANT SELECT ON IntruShielddb.* to MySQLuser@'agenthost' identified by
'MySQLpassword' ;
```

where the parameters are defined as follows:

Parameter	Description
IntruShielddb	The name of the database used by IntruShield (typically 'lf').
MySQLuser	The user that you created for the ArcSight SmartConnector to access the MySQL database.
AgentHost	The host name (or IP address) of the host running the ArcSight SmartConnector (for testing purposes, you could use %, which means 'any host').
MySQLPassword	The password of the user you created for the ArcSight SmartConnector.

### Install the SmartConnector

The following sections provide instructions for installing and configuring your selected SmartConnector.

#### Prepare to Install Connector

Before you install any SmartConnectors, make sure that the ArcSight products with which the connectors will communicate have already been installed correctly (such as ArcSight ESM or ArcSight

Logger). This configuration guide takes you through the installation process with **ArcSight Manager (encrypted)** as the destination.

For complete product information, read the *Administrator's Guide* as well as the *Installation and Configuration* guide for your ArcSight product before installing a new SmartConnector. If you are adding a connector to the ArcSight Management Center, see the *ArcSight Management Center Administrator's Guide* for instructions, and start the installation procedure at "Set Global Parameters (optional)" or "Select Connector and Add Parameter Information."

Before installing the SmartConnector, be sure the following are available:

- Local access to the machine where the SmartConnector is to be installed
- Administrator passwords

## Install Core Software


Unless specified otherwise at the beginning of this guide, this SmartConnector can be installed on all ArcSight supported platforms; for the complete list, see the *SmartConnector Product and Platform Support* document, available from the HPE SSO and Protect 724 sites.

- 1 Download the SmartConnector executable for your operating system from the HPE SSO site.
- 2 Start the SmartConnector installation and configuration wizard by running the executable.

Follow the wizard through the following folder selection tasks and installation of the core connector software:

Introduction  
Choose Install Folder  
Choose Shortcut Folder  
Pre-Installation Summary  
Installing...

- 3 When the installation of SmartConnector core component software is finished, the following window is displayed:

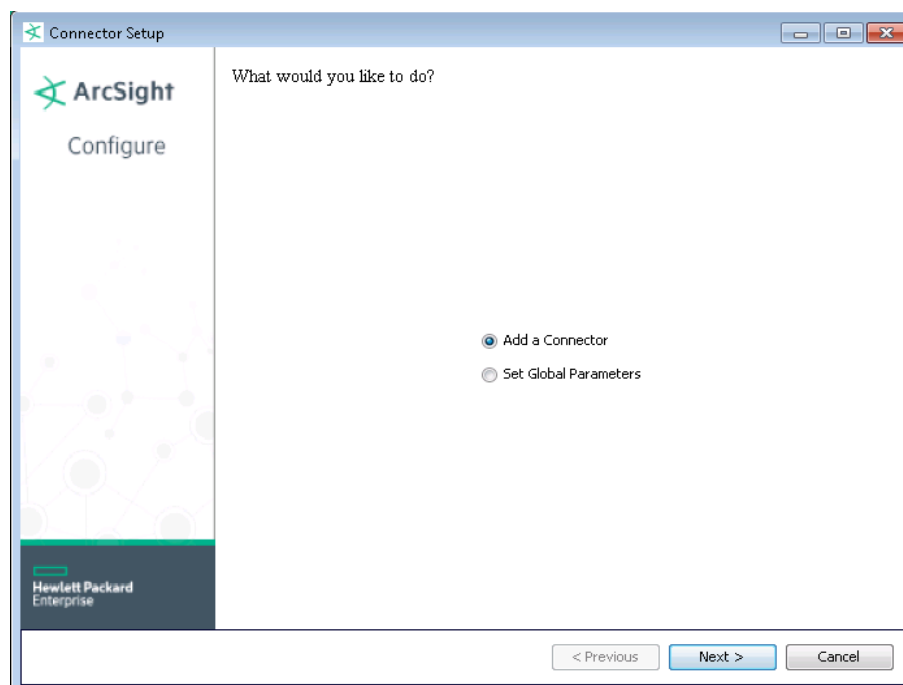

## Download MySQL JDBC Driver

- 1 Click **Cancel** to leave the configuration wizard at this point.
- 2 The following steps are required when you use the MySQL JDBC driver, required for Connector Appliance/ArcSight Management Center and Linux systems.
  - A For connector versions 7.2.4 and later, download the latest MySQL JDBC Driver from:  
<http://dev.mysql.com/downloads/connector/j>  
  
For connector versions 7.2.3 and earlier, download the MySQL 5.0.8 JDBC Driver from:  
<https://dev.mysql.com/downloads/connector/j/5.0.html>  
  
Install the driver.
  - B For software connectors, copy the appropriate jar file to `$ARCSIGHT_HOME\current\user\agent\lib`, where `$ARCSIGHT_HOME` refers to the connector install folder, such as `c:\ArcSight\SmartConnectors`. For Connector Appliance/ArcSight Management Center users, see "Add a JDBC Driver to the Connector Appliance/ArcSight Management Center" later in this guide.
  - C From `$ARCSIGHT_HOME/current/bin`, double-click `runagentsetup` to return to the SmartConnector Configuration Wizard.

## Set Global Parameters (optional)


If you choose to perform any of the operations shown in the following table, do so before adding your connector. After installing core software, you can set the following parameters:

Global Parameter	Setting
Set FIPS mode	Set to 'Enable' to enable FIPS compliant mode. To enable FIPS Suite B Mode, see the SmartConnector User Guide under "Modifying Connector Parameters" for instructions. Initially, this value is set to 'Disable'.
Set Remote Management	Set to 'Enable' to enable remote management from ArcSight Management Center. When queried by the remote management device, the values you specify here for enabling remote management and the port number will be used. Initially, this value is set to 'Disable'.
Remote management listener port	The remote management device will listen to the port specified in this field. The default port number is 9001.
Preferred IP Version	If both 'IPv4' and 'IPv6' IP addresses are available for the local host (the machine on which the connector is installed), you can choose which version is preferred. Otherwise, you will see only one selection. When both values are present, the initial setting is 'IPv4'.

After making your selections, click **Next**. A summary screen is displayed. Review the summary of your selections and click **Next**. Click **Continue** to return to the "Add a Connector" window. Continue the installation procedure with "Select Connector and Add Parameter Information."

### Select Connector and Add Parameter Information

- 1 Select **Add a Connector** and click **Next**. If applicable, you can enable FIPS mode and enable remote management later in the wizard after SmartConnector configuration.
- 2 Select **McAfee Network Security Manager DB (ID-based)** and click **Next**.
- 3 Enter the required SmartConnector parameters to configure the SmartConnector, then click **Next**.

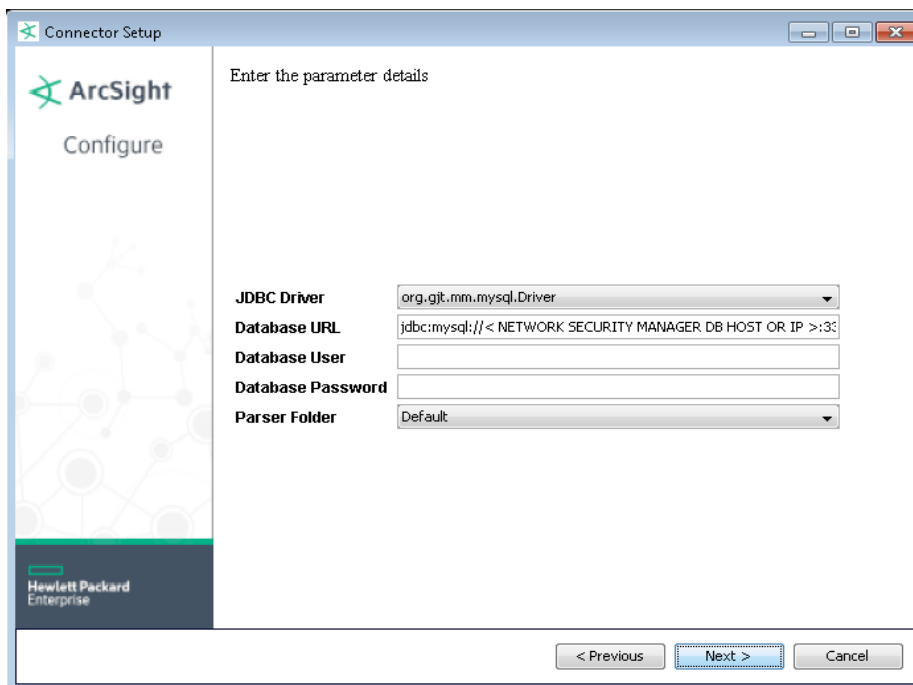

Parameter	Description
JDBC/ODBC Driver	Accept the default org.gjt.mm.mysql.Driver
Database URL	Enter the database URL or accept the default jdbc:mysql://<NETWORK SECURITY MANAGER DB HOST or IP>:3306/lf, replacing <NETWORK SECURITY MANAGER DB HOST or IP> with the database host's name or IP address.
Database User	Login name assigned to access the database
Database Password	Password assigned to access the database
Parser Folder	You can specify whether to enable optional 'Payload Sampling' or 'Type Specific Data' or both. When 'Payload Sampling' is selected during the installation process, retrieved payload is stored as part of the events. When 'Type Specific Data' is selected during the installation process, the IP addresses involved in Host Sweep types of alerts are mapped to Device Custom String 6; Device Custom String 1 contains a count of the number of IP addresses involved in the alert. Selecting 'Type Specific Data and Payload Sampling' enables both options. Selecting 'Default' disables both options.

## Select a Destination

- 1 The next window asks for the destination type; make sure **ArcSight Manager (encrypted)** is selected and click **Next**. (For information about this destination or any of the other destinations listed, see the *ArcSight SmartConnector User Guide*.)
- 2 Enter values for the **Manager Host Name**, **Manager Port**, **User** and **Password** required parameters. This is the same ArcSight user name and password you created during the ArcSight Manager installation. Click **Next**.
- 3 Enter a name for the SmartConnector and provide other information identifying the connector's use in your environment. Click **Next**. The connector starts the registration process.
- 4 The certificate import window for the ArcSight Manager is displayed. Select **Import the certificate to the connector from destination** and click **Next**. (If you select **Do not import the certificate to connector from destination**, the connector installation will end.) The certificate is imported and the **Add connector Summary** window is displayed.

## Complete Installation and Configuration

- 1 Review the **Add Connector Summary** and click **Next**. If the summary is incorrect, click **Previous** to make changes.
- 2 The wizard now prompts you to choose whether you want to run the SmartConnector as a stand-alone process or as a service. If you choose to run the connector as a stand-alone process, select **Leave as a standalone application**, click **Next**, and continue with step 5.
- 3 If you chose to run the connector as a service, with **Install as a service** selected, click **Next**. The wizard prompts you to define service parameters. Enter values for **Service Internal Name** and **Service Display Name** and select **Yes** or **No** for **Start the service automatically**. The **Install Service Summary** window is displayed when you click **Next**.
- 4 Click **Next** on the summary window.
- 5 To complete the installation, choose **Exit** and Click **Next**.



For some SmartConnectors, a system restart is required before the configuration settings you made take effect. If a **System Restart** window is displayed, read the information and initiate the system restart operation.



Save any work on your computer or desktop and shut down any other running applications (including the ArcSight Console, if it is running), then shut down the system.

For instructions about upgrading the connector or modifying parameters, see the *SmartConnector User Guide*.

## Payload Support

*Payload* refers to the information carried in the body of an event's network packet, as distinct from the packet's header data. While security event detection and analysis usually centers on header data, packet payload may also be forensically significant.

You can retrieve, preserve, view, or discard payloads for the McAfee Network Security Manager DB (New) SmartConnector using the ArcSight Console. Because event payloads are relatively large, ArcSight does not store them by default. Instead, you can request payloads from devices for selected events through the Console. If the payload is still held on the device, the ArcSight SmartConnector retrieves it and sends it to the Console.

Payloads are downloaded and stored only on demand; you must configure McAfee Network Security Manager DB (New) SmartConnector to log these packets. By default, 256 bytes of payload will be retrieved.

Whether an event has a payload to store is visible in event grids. Unless you specifically request to do so, only the event's "payload ID" (information required to retrieve the payload from the event source) is stored. Payload retention periods are controlled by the configuration of each source device.

### Locate Payload-Bearing Events

The first step in handling event payloads is to be able to locate payload-bearing events among the general flow of events in a grid view. In an ArcSight Console Viewer panel grid view, right-click a column header and choose **Add Column < Device > Payload ID**. Look for events showing a Payload ID in that column.

### Retrieve Payloads

In a Viewer panel grid view, double-click an event with an associated payload. In the Event Inspector, click the **Payload** tab, then click **Retrieve Payload**.

### Preserve Payloads

In a grid view, right-click an event with an associated payload, select **Payload**, then **Preserve**. Alternatively, in the Event Inspector, click the **Payload** tab, then **Preserve Payload**.

### Discard Payloads

In a grid view, right-click an event with an associated payload and select **Payload**, then **Discard Preserved**. You also can use the Event Inspector: In a grid view, double-click an event with an associated payload. In the Event Inspector, click the **Payload** tab. Click **Discard Preserved Payload**.

### Save Payloads to Files

In a grid view, double-click an event with an associated payload. In the Event Inspector, click the

**Payload** tab. Click **Save Payload**. In the **Save** dialog box, navigate to a directory and enter a name in the **File name** text field. Click **Save**.

## Run the SmartConnector

SmartConnectors can be installed and run in stand-alone mode, on Windows platforms as a Windows service, or on UNIX platforms as a UNIX daemon, depending upon the platform supported. On Windows platforms, SmartConnectors also can be run using shortcuts and optional Start menu entries.

If the connector is installed in stand-alone mode, it must be started manually and is not automatically active when a host is restarted. If installed as a service or daemon, the connector runs automatically when the host is restarted. For information about connectors running as services or daemons, see the *ArcSight SmartConnector User Guide*.

To run all SmartConnectors installed in stand-alone mode on a particular host, open a command window, go to `$ARCSIGHT_HOME\current\bin` and run: `arcsight connectors`

To view the SmartConnector log, read the file `$ARCSIGHT_HOME\current\logs\agent.log`; to stop all SmartConnectors, enter `Ctrl+C` in the command window.

## Device Event Mapping to ArcSight Fields

The following section lists the mappings of ArcSight data fields to the device's specific event definitions. See the *ArcSight Console User's Guide* for more information about the ArcSight data fields.

### NSM 8.x Mappings

ArcSight ESM Field	Device-Specific Field
Agent (Connector) Severity	High = High (Device Severity); Medium = Medium (Device Severity); Low = Low (Device Severity)
Base Event Count	ATTACK_COUNT
Destination Address	TARGET_IP
Destination DNS Domain	DESTINATION_DNS_DOMAIN
Destination Port	TARGET_PORT
Destination User Id	DESTINATION_USER_ID
Device Action	resultSetValue (200=Unknown, 400=Suspicious, 999=Blocked, 888=Set to block)
Device Address	SENSOR_IP
Device Custom IPv6 Address 1	SENSOR_IP (Device IPv6 Address)
Device Custom IPv6 Address 2	SOURCE_IP (Source IPv6 Address)
Device Custom IPv6 Address 3	TARGET_IP (Destination IPv6 Address)
Device Custom Number 3	EXECUTABLE_CONFIDENCE
Device Custom String 1	PACKET_LOG_TYPE
Device Custom String 2	ALERT_ID
Device Custom String 3	resultSetValue ('ACTION_CODE')
Device Custom String 4	IV_ADMIN_DOMAIN
Device Custom String 5	port_name ('MONITORING_PORT')
Device Direction	DIRECTION
Device Event Category	CATEGORY

ArcSight ESM Field	Device-Specific Field
Device Event Class ID	ATTACKIDREF
Device Host Name	SENSOR_NAME
Device Inbound Interface	INTERFACE
Device Product	'Network Security Manager'
Device Receipt Time	ATTACK_TIME
Device Severity	One of (ATTACK_SEVERITY, low)
Device Vendor	'McAfee'
Event Outcome	resultSetValue (100=Success, 300=Failure)
File Hash	FILEHASH
File Name	FILENAME
Name	one of (ATTACK_NAME, Severe network attack)
Source Address	SOURCE_IP
Source DNS Domain	SOURCE_DNS_DOMAIN
Source Port	SOURCE_PORT
Source User Id	SOURCE_USER_ID
Transport Protocol	NETWORK_PROTOCOL_ID

## NSM 8.x Payload Mappings

ArcSight ESM Field	Device-Specific Field
Agent (Connector) Severity	High = High (Device Severity), Medium = Medium (Device Severity), Low = Low (Device Severity)
Base Event Count	ATTACK_COUNT
Destination Address	TARGET_IP
Destination DNS Domain	DESTINATION_DNS_DOMAIN
Destination Port	TARGET_PORT
Destination User Id	DESTINATION_USER_ID
Device Action	resultSetValue (200=Unknown, 400=Suspicious, 999=Blocked, 888=Set to block)
Device Address	SENSOR_IP
Device Custom IPv6 Address 1	SENSOR_IP (Device IPv6 Address)
Device Custom IPv6 Address 2	SOURCE_IP (Source IPv6 Address)
Device Custom IPv6 Address 3	TARGET_IP (Destination IPv6 Address)
Device Custom Number 1	PACKETLOGID
Device Custom Number 3	EXECUTABLE_CONFIDENCE
Device Custom String 1	PACKETLOGTYPE (PACKET_LOG_TYPE)
Device Custom String 2	ALERT_ID
Device Custom String 3	resultSetValue ('ACTION_CODE')
Device Custom String 4	IV_ADMIN_DOMAIN
Device Custom String 5	port_name ('MONITORING_PORT')
Device Direction	DIRECTION
Device Event Category	CATEGORY
Device Event Class ID	ATTACKIDREF
Device Host Name	SENSOR_NAME
Device Inbound Interface	INTERFACE

ArcSight ESM Field	Device-Specific Field
Device Product	'Network Security Manager'
Device Receipt Time	ATTACK_TIME
Device Severity	One of (ATTACK_SEVERITY, Low)
Device Vendor	'McAfee'
Event Outcome	resultSetValue (100=Success, 300=Failure)
External ID	ALERT_ID
File Hash	FILEHASH
File Name	FILENAME
Name	one of (ATTACK_NAME, Severe network attack)
Source Address	SOURCE_IP
Source DNS Domain	SOURCE_DNS_DOMAIN
Source Port	SOURCE_PORT
Source User Id	SOURCE_USER_ID
Transport Protocol	NETWORK_PROTOCOL_ID

### NSM 8.x Payload Type Specific Data Mappings

ArcSight ESM Field	Device-Specific Field
Destination DNS Domain	DESTINATION_DNS_ID
Destination User Id	DESTINATION_USER_ID
Device Action	resultSetValue (200=Unknown, 400=Suspicious, 999=Blocked, 888=Set to block)
Device Custom Number 1	PACKETLOGID ('PACKETLOGID')
Device Custom Number 2	IP_COUNT_KEY ('IP_COUNT')
Device Custom String 6	TYPE_SPECIFIC_DATA_KEY ('TYPE_SPECIFIC_DATA')
Event Outcome	resultSetValue (100=Success, 300=Failure)
External ID	ALERT_ID
Source DNS Domain	SOURCE_DNS_DOMAIN
Source User Id	SOURCE_USER_ID

### NSM 8.x Type Specific Data Mappings

ArcSight ESM Field	Device-Specific Field
Destination DNS Domain	DESTINATION_DNS_ID
Destination User Id	DESTINATION_USER_ID
Device Action	resultSetValue (200=Unknown, 400=Suspicious, 999=Blocked, 888=Set to block)
Device Custom Number 1	IP_COUNT_KEY ('IP_COUNT')
Device Custom String 6	TYPE_SPECIFIC_DATA_KEY ('TYPE_SPECIFIC_DATA')
Event Outcome	resultSetValue (100=Success, 300=Failure)
Source DNS Domain	SOURCE_DNS_DOMAIN
Source User Id	SOURCE_USER_ID

## NSM 7.5 Mappings

ArcSight ESM Field	Device-Specific Field
Agent (Connector) Severity	High = High (Device Severity); Medium = Medium (Device Severity); Low = Low (Device Severity)
Application Protocol	PROTOCOL_ID
Base Event Count	ATTACK_COUNT
Destination Address	TARGET_IP
Destination DNS Domain	DESTINATION_DNS_DOMAIN
Destination Port	TARGET_PORT
Destination User Id	Destination_User_ID
Device Action	resultSetValue (200=Unknown, 400=Suspicious, 999=Blocked, 888=Set to block)
Device Address	SENSOR_IP
Device Custom IPv6 Address 1	SENSOR_IP (Device IPv6 Address)
Device Custom IPv6 Address 2	SOURCE_IP (Source IPv6 Address)
Device Custom IPv6 Address 3	TARGET_IP (Destination IPv6 Address)
Device Custom String 1	PACKET_LOG_TYPE
Device Custom String 2	ALERT_ID
Device Custom String 3	resultSetValue ('ACTION_CODE')
Device Custom String 4	IV_ADMIN_DOMAIN
Device Custom String 5	port_name ('MONITORING_PORT')
Device Direction	DIRECTION
Device Event Category	CATEGORY
Device Event Class ID	ATTACKIDREF
Device Host Name	SENSOR_NAME
Device Inbound Interface	INTERFACE
Device Product	'Network Security Manager'
Device Receipt Time	ATTACK_TIME
Device Severity	One of (ATTACK_SEVERITY, low)
Device Vendor	'McAfee'
Event Outcome	resultSetValue (100=Success, 300=Failure)
Name	one of (ATTACK_NAME, Severe network attack)
Source Address	SOURCE_IP
Source DNS Domain	SOURCE_DNS_DOMAIN
Source Port	SOURCE_PORT
Source User Id	Source_User_ID
Transport Protocol	NETWORK_PROTOCOL_ID

## NSM 7.5 Payload Mappings

ArcSight ESM Field	Device-Specific Field
Agent (Connector) Severity	High = High (Device Severity), Medium = Medium (Device Severity), Low = Low (Device Severity)
Base Event Count	ATTACK_COUNT
Destination Address	TARGET_IP
Destination DNS Domain	DESTINATION_DNS_DOMAIN

<b>ArcSight ESM Field</b>	<b>Device-Specific Field</b>
Destination Port	TARGET_PORT
Destination User Id	DESTINATION_USER_ID
Device Action	resultSetValue (200=Unknown, 400=Suspicious, 999=Blocked, 888=Set to block)
Device Address	SENSOR_IP
Device Custom IPv6 Address 1	SENSOR_IP (Device IPv6 Address)
Device Custom IPv6 Address 2	SOURCE_IP (Source IPv6 Address)
Device Custom IPv6 Address 3	TARGET_IP (Destination IPv6 Address)
Device Custom Number 1	PACKETLOGID
Device Custom String 1	PACKETLOGTYPE (PACKET_LOG_TYPE)
Device Custom String 2	ALERT_ID
Device Custom String 3	resultSetValue ('ACTION_CODE')
Device Custom String 4	IV_ADMIN_DOMAIN
Device Custom String 5	port_name ('MONITORING_PORT')
Device Direction	DIRECTION
Device Event Category	CATEGORY
Device Event Class ID	ATTACKIDREF
Device Host Name	SENSOR_NAME
Device Inbound Interface	INTERFACE
Device Product	'Network Security Manager'
Device Receipt Time	ATTACK_TIME
Device Severity	One of (ATTACK_SEVERITY, low)
Device Vendor	'McAfee'
Event Outcome	resultSetValue (100=Success, 300=Failure)
External Id	ALERT_ID
Name	one of (ATTACK_NAME, Severe network attack)
Source Address	SOURCE_IP
Source DNS Domain	SOURCE_DNS_DOMAIN
Source Port	SOURCE_PORT
Source User Id	SOURCE_USER_ID
Transport Protocol	NETWORK_PROTOCOL_ID

## NSM 7.5 Payload Type Specific Data Mappings

<b>ArcSight ESM Field</b>	<b>Device-Specific Field</b>
Destination DNS Domain	DESTINATION_DNS_ID
Destination User Id	DESTINATION_USER_ID
Device Action	resultSetValue (200=Unknown, 400=Suspicious, 999=Blocked, 888=Set to block)
Device Custom Number 1	PACKETLOGID ('PACKETLOGID')
Device Custom Number 2	IP_COUNT_KEY ('IP_COUNT')
Device Custom String 6	TYPE_SPECIFIC_DATA_KEY ('TYPE_SPECIFIC_DATA')
Event Outcome	resultSetValue (100=Success, 300=Failure)
External ID	ALERT_ID
Source DNS Domain	SOURCE_DNS_DOMAIN

ArcSight ESM Field	Device-Specific Field
Source User Id	SOURCE_USER_ID

## NSM 7.5 Type Specific Data Mappings

ArcSight ESM Field	Device-Specific Field
Destination DNS Domain	DESTINATION_DNS_ID
Destination User Id	Destination_User_ID
Device Action	resultSetValue (200=Unknown, 400=Suspicious, 999=Blocked, 888=Set to block)
Device Custom Number 1	IP_COUNT_KEY ('IP_COUNT')
Device Custom String 6	TYPE_SPECIFIC_DATA_KEY ('TYPE_SPECIFIC_DATA')
Event Outcome	resultSetValue (100=Success, 300=Failure)
Source DNS Domain	SOURCE_DNS_DOMAIN
Source User Id	SOURCE_USER_ID

## Troubleshooting

**"When I use the latest MySQL JDBC driver, the connector does not receive events."**

Connector versions 7.2.4 and later use the latest MySQL JDBC driver. For connector versions 7.2.3 and earlier, you will need the MySQL 5.0.8 JDBC Driver, which you can download from:

<https://dev.mysql.com/downloads/connector/j/5.0.html>